


KM COATINGS MFG ROOFING SYSTEM DETAIL

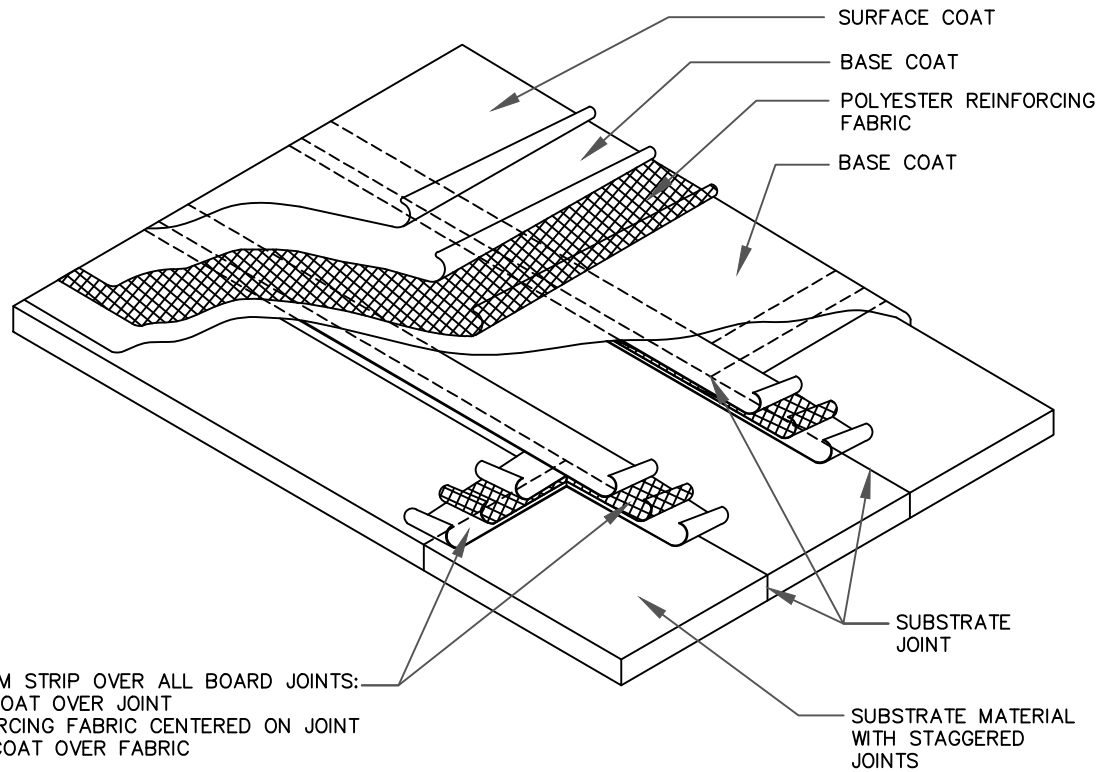

DETAIL KEYNOTES

SURFACE COAT	KM ELASTOMERIC ROOF COATINGS.
BASE COAT	KM ELASTOMERIC ROOF COATINGS.
FLASHING COMPOUND	KM FLASHING COMPOUND AS REQUIRED. APPLY AT 1/8" THICK AND USE WITH POLYESTER REINFORCEMENT.
POLYESTER	KM REINFORCING POLYESTER.
SURFACE PREPARATION	ENSURE SURFACES ARE FREE OF ANY SURFACE CONTAMINATES. IF OXIDATION IS PRESENT, GRINDING AFFECTED AREAS WITH WIRE BRUSH IS NECESSARY. THEN PRIME ENTIRE ROOF WITH KM RUST INHIBITOR PRIMER APPLIED AT THE RATE OF 18-24 WET MILS (150-180 SQUARE FEET PER GALLON).

DECK JOINT
STRIPPING DETAIL

NUMBER:

KM-DJS-003

DATE:

NOVEMBER 2016



www.kmcoatings.us