


KM COATINGS MFG ROOFING SYSTEM DETAIL

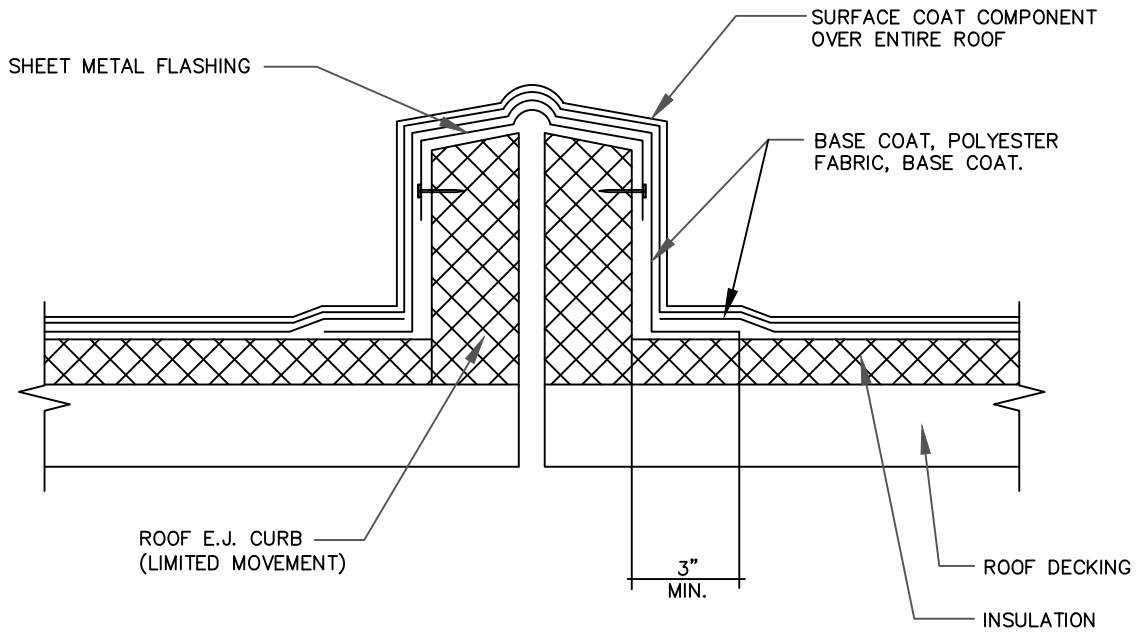

DETAIL KEYNOTES

| | |
|---------------------|---|
| SURFACE COAT | KM ELASTOMERIC ROOF COATINGS. |
| BASE COAT | KM ELASTOMERIC ROOF COATINGS. |
| FLASHING COMPOUND | KM FLASHING COMPOUND AS REQUIRED. APPLY AT 1/8" THICK AND USE WITH POLYESTER REINFORCEMENT. |
| POLYESTER | KM REINFORCING POLYESTER. |
| SURFACE PREPARATION | ALL SURFACES SHALL BE CLEAN, DRY, AND FREE OF ANY DIRT, DUST, GRAVEL, OIL, SURFACE CHEMICALS OR OTHER CONTAMINANTS THAT MAY INTERFERE WITH OPTIMUM ADHESION. KM RECOMMENDS AN ADHESION TEST PRIOR TO COATING APPLICATION. IF ADHESION TEST FAILS, ADDITIONAL CLEANING AND/OR PRIMING MAY BE REQUIRED. |

EXPANSION JOINT FLASHING DETAIL

NUMBER:

KM-EJD-007F

DATE:

NOVEMBER 2016



www.kmcoatings.us